


### REFRIGERANT CYLINDER VALVE - HEX CAPS



Typical application

Model	Description
K1-16	Refrigerant Drum Seal Cap <b>Female</b> (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) w/Gasket.
K1-17	<b>Female 1/2" NPSM</b> U.S.A. with Gasket.
K1-18	<b>Female 3/4" NPSM</b> U.S.A. with Gasket. For Refrigerant Drums 56 Kg. (125 Lbs.) and 65 Kg. (145 Lbs.)
K1-19	<b>G 5/8" Female</b> (UK) with Gasket.
K1-21	<b>Female</b> (21,7x1,814W LH France), (W21,8x1/14" LH Germany, Nederland) w/Gasket. For <b>Flammable gases</b> .
K1-26	<b>W26-14 Female</b> (Japan) with Gasket.
<b>Spare Parts</b>	
K1-F	Gasket for K1-16 and K1-21.
K1-G	Gasket for K1-17.
K1-H	Gasket for K1-18.
K1-I	Gasket for K1-19.
K1-L	Gasket for K1-26.


### REFRIGERANT CYLINDER ADAPTERS with GASKET & STANDARD SEAL CAP

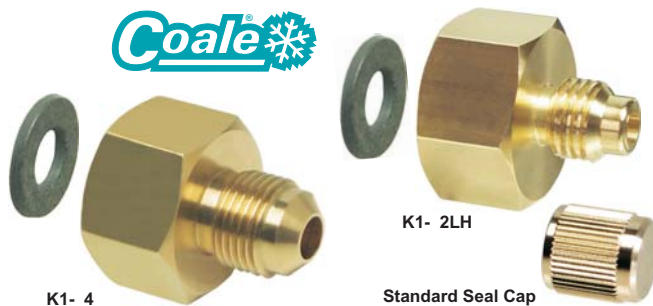

Model	Description
K1- 4	Refrigerant Drum Adapter <b>Female</b> (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) w/Gasket x 3/8" (5/8" 18UNF) <b>Male SAE Flare</b> w/Standard Seal Cap.
K1- 2	<b>R134a Female</b> (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) with Gasket x 1/2" <b>Male ACME-16</b> with Seal Cap.
K1- 9	<b>Female</b> (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) with Gasket x 1/4" (7/16" 20UNF) <b>Male SAE Flare</b> with Seal Cap.
K1- 2LH	<b>HFO-1234yf Female</b> (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) with Gasket x 1/2" <b>Male ACME-16 LH</b> with Seal Cap.
K1- 8	<b>Female 1/2" NPSM</b> U.S.A. with Gasket x 1/4" (7/16" 20UNF) <b>Male SAE Flare</b> with Standard Seal Cap.
K1-82	<b>R134a Female 1/2" NPSM</b> U.S.A. with Gasket x 1/2" <b>Male ACME-16</b> with Seal Cap.

K1-82LH	<b>HFO-1234yf Female 1/2" NPSM</b> U.S.A. with Gasket x 1/2" <b>Male ACME-16 LH</b> with Seal Cap.
K1-86	<b>Female 1/2" NPSM</b> U.S.A. with Gasket x 3/8" (5/8" 18UNF) <b>Male SAE Flare</b> with Standard Seal Cap.
K1- 1	<b>Female 3/4" NPSM</b> U.S.A. with Gasket x 1/4" (7/16" 20UNF) <b>Male SAE Flare</b> with Standard Seal Cap. For Refrigerant Drums 56 Kg. (125 Lbs.) & 65 Kg. (145 Lbs.)
K1-12	<b>R134a Female 3/4" NPSM</b> U.S.A. with Gasket x 1/2" <b>Male ACME-16</b> with Standard Seal Cap.
K1-12LH	<b>HFO-1234yf Female 3/4" NPSM</b> U.S.A. with Gasket x 1/2" <b>Male ACME-16 LH</b> with Seal Cap.
K1- 3	<b>Female 3/4" NPSM</b> U.S.A. with Gasket x 3/8" (5/8" 18UNF) <b>Male SAE Flare</b> with Standard Seal Cap.
K1-13	<b>G 5/8" Female</b> (UK) with Gasket x 1/4" (7/16" 20UNF) <b>Male SAE Flare</b> with Standard Seal Cap.
K1-24	<b>R134a G 5/8" Female</b> (UK) with Gasket x 1/2" <b>Male ACME-16</b> with Standard Seal Cap.
K1-24LH	<b>HFO-1234yf G 5/8" Female</b> (UK) with Gasket x 1/2" <b>Male ACME-16 LH</b> with Standard Seal Cap.
K1-25	<b>5/8" Female</b> (UK) with Gasket x 3/8" (5/8" 18UNF) <b>Male SAE Flare</b> with Standard Seal Cap.
K1-27	<b>Female W16-14</b> (Japan) with Gasket x 1/4" (7/16" 20UNF) <b>Flare Male</b> with Standard Seal Cap.
K1-28	<b>R134a Female W26-14</b> (Japan) with Gasket x 1/2" <b>ACME-16 Male</b> with Standard Seal Cap.
K1-28LH	<b>HFO-1234yf Female W26-14</b> (Japan) with Gasket x 1/2" <b>ACME-16 LH Male</b> with Standard Seal Cap.
K1-29	<b>Female W26-14</b> (Japan) with Gasket x 3/8" (5/8" 18UNF) <b>Flare Male</b> with Standard Seal Cap.

### REFRIGERANT CYLINDER ADAPTERS with SEAL CAP and RETAINER PLASTIC STRAP or BEAD CHAIN

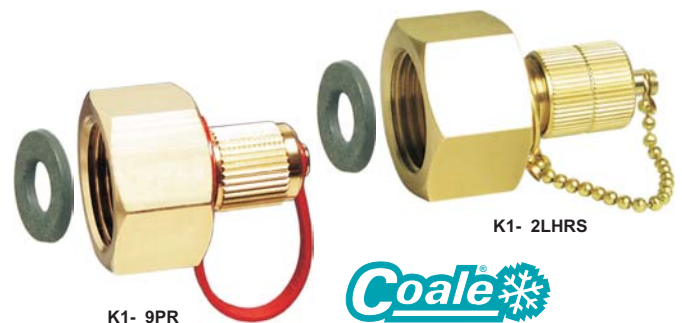

ENALT offers a complete line of K1 cylinder adapters for 45 degree SAE flare ports, 1/2" M. ACME-16 Std. and LH Left Hand & Seal Cap with Plastic Retainer Strap or Brass Retainer Bead Chain. Please add the following suffix to Standard K1- Models

- **PR Red - Liquid Phase;**
- **PB Blue - Vapor Phase;**
- **PN White - Neutral;**
- **RS Brass Retainer Bead Chain**

#### Spare Parts

K1-C	Gasket for K1- 4, K1- 2, K1- 9 and K1- 2LH.
K1-D	Gasket for K1- 8, K1-82, K1-82LH and K1-86
K1-E	Gasket for K1- 1, K1-12, K1-12LH, K1- 3 and K1- 5.
K1-A	Gasket for K1-13, K1-24, K1-24LH and K1-25.
K1-M	Gasket for K1-27, K1-28, K1-28LH and K1-29.