


**STRAIGHT - 45° BEND and 90° BEND QUICK COUPLERS - Female SAE/ACME Swivel Nut with Neoprene Gasket and Valve Core Depressor x 1/8" MPT For Ball Valves BVF-\_\_\_ Series. See page A26g.**



Model	Description
QC-S2AM	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut w/Gasket & Depressor x 1/8" M. NPT.
QC-S2LHAM	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/8" M. NPT.
QC-S4AM	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" Male NPT.
QC-S6AM	3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" M. NPT.
QC-45E2AM	R134a 45° Bend 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" M. NPT.
QC-45E2LHAM	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/8" M. NPT.
QC-45E4AM	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" Male NPT.
QC-45E6AM	3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" M. NPT.
QC-E2AM	R134a 90° Bend 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" M. NPT.
QC-E2LHAM	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/8" M. NPT.
QC-E4AM	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" Male NPT.
QC-E6AM	3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" M. NPT.

**STRAIGHT - 45° BEND and 90° BEND QUICK COUPLERS - Female SAE/ACME-16 Swivel Nut with Neoprene Gasket and Valve Core Depressor x FPT**  
See Page A24e for Vacuum, Compound, and Pressure Gauges. Page A26b for HP AM, HP AAM Charging Hoses.

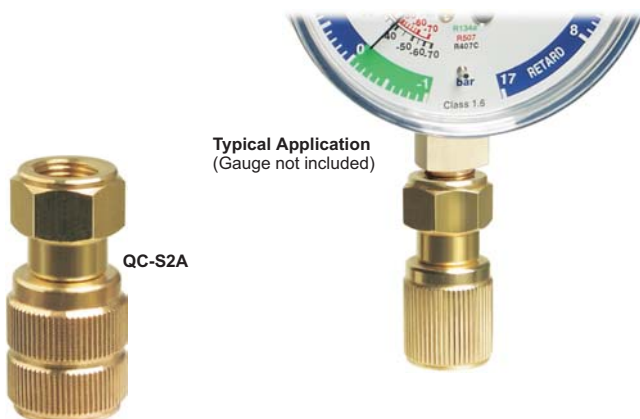

Typical Application  
(Vacuum Gauge not included)

Typical Application  
(Vacuum Gauge not included)




Model	Description
QC-S2A	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-S2LHA	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/8" F. NPT.
QC-S4A	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" Female NPT.
QC-S6A	3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" F. NPT.
QC-45E2A	R134a 45° Bend 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-45E2LHA	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/8" F. NPT.
QC-45E4A	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" Female NPT.
QC-45E6A	3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" F. NPT.
QC-E2A	R134a 90° Bend 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-E2LHA	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/8" F. NPT.
QC-E4A	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" Female NPT.
QC-E6A	3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" F. NPT.

### STRAIGHT & 90° BEND QUICK COUPLERS - Female SAE / ACME-16 Swivel Nut with Neoprene Gasket and Valve Core Depressor x Female SAE / ACME-16 Swivel Nut with Neoprene Gasket

For Solenoid Switch onto 1/4", 3/8" Male SAE Flare and 1/2" ACME-16 inlet port on the Vacuum Pumps. See Page 54 for Electronic Vacuum Gauges.

**NOTE :** Remove the Valve Core Depressor, if necessary, and re-install into other side with Neoprene Gasket Seal

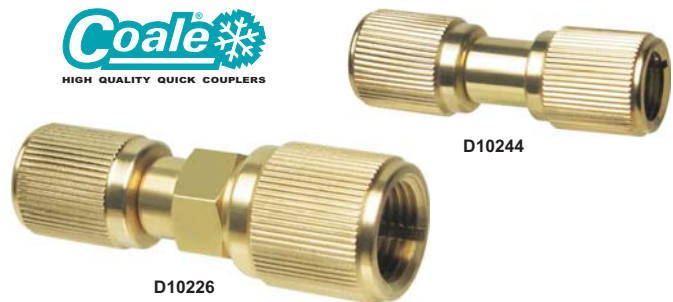

Model	Description
D10222	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D10226	R134a 1/2" F. ACME-16 with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D10242	R134a 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" F. ACME-16 with Gasket.
D1022LH2	R1234yf Straight Quick Coupler 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D1022LH6	R1234yf 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D1022LH4	R1234yf 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) F. SAE with Gasket.
D10244	Straight Quick Coupler 1/4" (7/16" 20UNF) F. SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) F. SAE Swivel Nut with Gasket.
D10246	1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D10266	3/8" (5/8" 18UNF) F. SAE with Gasket x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D10245E22	R134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D10245E26	R134a 45° 1/2" F. ACME-16 with Gasket and Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D10245E42	R134a 45° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" F. ACME-16 with Gasket.
D10245E2LH2	R1234yf 45° Bend Quick Coupler 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D10245E2LH6	R1234yf 45° 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D10245E2LH4	R1234yf 45° 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) F. SAE with Gasket.
D10245E44	45° Bend Quick Coupler 1/4" (7/16" 20UNF) F. SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) F. SAE Swivel Nut with Gasket.
D10245E46	45° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D10245E66	45° 3/8" (5/8" 18UNF) F. SAE with Gasket x 3/8" (5/8" 18UNF) F. SAE with Gasket.

D102E22	R134a 90 Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D102E26	R134a 90° 1/2" F. ACME-16 with Gasket and Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D102E42	R134a 90° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" F. ACME-16 with Gasket.
D102E2LH2	R1234yf 90° Bend Quick Coupler 1/2" Female ACME-16 LH Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D102E2LH6	R1234yf 90° 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D102E2LH4	R1234yf 90° 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) F. SAE with Gasket.
D102E44	90° Bend Quick Coupler 1/4" (7/16" 20UNF) F. SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) F. SAE Swivel Nut with Gasket.
D102E46	90° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 3/8" (5/8" 18UNF) F. SAE with Gasket.
D102E66	90° 3/8" (5/8" 18UNF) F. SAE with Gasket x 3/8" (5/8" 18UNF) F. SAE with Gasket.

### STRAIGHT QUICK COUPLERS - Female SAE Flare Union with Copper Gasket x Female SAE / ACME-16 Swivel Nut with Neoprene Gasket and Depressor



Model	Description
QC-S42	R134a Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Flare w/Long Tan Copper Gasket x 1/2" Female ACME-16 Swivel Nut with Gasket & Depressor.
QC-S62	R134a 3/8" (5/8" 18UNF) F. SAE Flare w/LTCG x 1/2" F. ACME-16 with Gasket & Depressor.
QC-S42LH	R1234yf 1/4" (7/16" 20UNF) F. SAE Flare w/LTCG x 1/2" F. ACME-16 LH with Gasket & Depressor.
QC-S62LH	R1234yf 3/8" (5/8" 18UNF) F. SAE Flare w/LTCG x 1/2" F. ACME-16 LH with Gasket & Depressor.
QC-S44	1/4" (7/16" 20UNF) F. SAE Flare w/LTCG x 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor.
QC-S64	3/8" (5/8" 18UNF) F. SAE Flare w/LTCG x 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor.
QC-S46	1/4" (7/16" 20UNF) F. SAE Flare w/LTCG x 3/8" (5/8" 18UNF) F. SAE with Gasket.
QC-S66	3/8" (5/8" 18UNF) F. SAE Flare w/LTCG x 3/8" (5/8" 18UNF) F. SAE with Gasket.
<b>Spare Parts</b>	
B3- 4	Long Tan Copper Gasket for 1/4" (7/16" 20UNF) F. SAE.
B3- 6	Long Tan Copper Gasket for 3/8" (5/8" 18UNF) F. SAE.

### STRAIGHT QUICK COUPLERS - Female SAE / ACME-16 Swivel Nut with Neoprene Gasket and Depressor x Male SAE / ACME-16 Flare with Valve Core



Model	Description
QC-22	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-24	R134a 1/2" F. ACME-16 with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-26	R134a 1/2" F. ACME-16 with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-42	R134a 1/4" F. SAE (7/16" 20UNF) with Gasket & Depressor x 1/2" M. ACME-16 with Valve Core.
QC-62	R134a 3/8" F. SAE (5/8" 18UNF) with Gasket x 1/2" M. ACME-16 with Valve Core.
QC-2LH2	R1234yf 1/2" Female ACME-16 LH Swivel Nut with Gasket & Depressor x 1/2" Male ACME-16 w/Valve Core.
QC-2LH4	R1234yf 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-2LH6	R1234yf 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-42LH	R1234yf 1/4" F. SAE (7/16" 20UNF) with Gasket & Depressor x 1/2" M. ACME-16 LH with Valve Core.
QC-62LH	R1234yf 3/8" F. SAE (5/8" 18UNF) with Gasket x 1/2" M. ACME-16 LH with Valve Core.
QC-44	1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-46	1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-64	3/8" (5/8" 18UNF) F. SAE with Gasket x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-66	3/8" (5/8" 18UNF) F. SAE with Gasket x 3/8" (5/8" 18UNF) M. SAE Flare.

### STRAIGHT ADAPTERS - Female SAE / 1/2" ACME-16 with Neoprene Gasket & Valve Core Depressor x Male SAE / 1/2" ACME-16 with Valve Core



Model	Description
AD24	R134a Straight Adapter 1/2" Female ACME-16 with Gasket & Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
AD26	R134a 1/2" F. ACME-16 with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
AD42	R134a 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" M. ACME-16 with Valve Core.
AD62	R134a 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/2" M. ACME-16 with Valve Core.

AD2LH4	R1234yf 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE with Valve Core.
AD2LH6	R1234yf 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
AD42LH	R1234yf 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" M. ACME-16 LH with Valve Core.
AD62LH	R1234yf 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/2" M. ACME-16 LH with Valve Core.
AD46	1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
AD64	3/8" (5/8" 18UNF) F. SAE with Gasket x 1/4" (7/16" 20UNF) M. SAE with Valve Core.

### 45° BEND QUICK COUPLERS - Female SAE / 1/2" ACME-16 Swivel Nut w/Neoprene Gasket & Valve Core Depressor x Male SAE / 1/2" ACME-16 with Valve Core



Model	Description
QC-45E22	R134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket & Depressor x 1/2" Male ACME-16 with Valve Core.
QC-45E24	R134a 45° 1/2" F. ACME-16 with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-45E26	R134a 45° 1/2" F. ACME-16 with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-45E42	R-134a 45° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" M. ACME-16 with Valve Core.
QC-45E62	R134a 45° 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/2" M. ACME-16 with Valve Core.
QC-45E2LH2	R1234yf 45° 1/2" F. ACME-16 LH with Gasket & Depressor x 1/2" Male ACME-16 with Valve Core.
QC-45E2LH4	R1234yf 45° 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE w/Valve Core
QC-45E2LH6	R1234yf 45° 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-45E42LH	R-1234yf 45° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" M. ACME-16 LH with Valve Core.
QC-45E62LH	R134a 45° 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/2" M. ACME-16 LH with Valve Core.
QC-45E44	45° 1/4" (7/16" 20UNF) F. SAE w/Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-45E46	45° 1/4" (7/16" 20UNF) F. SAE w/Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-45E64	45° 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-45E66	45° 3/8" (5/8" 18UNF) F. SAE with Gasket x 3/8" (5/8" 18UNF) M. SAE Flare.

### 90° BEND QUICK COUPLERS - Female SAE / 1/2" ACME-16 Swivel Nut w/Neoprene Gasket & Valve Core Depressor x Male SAE / 1/2" ACME-16 with Valve Core



QC-E42



Model	Description
QC-E22	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket & Depressor x 1/2" Male ACME-16 with Valve Core.
QC-E24	R134a 90° 1/2" F. ACME-16 with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-E26	R134a 90° 1/2" F. ACME-16 with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-E42	R134a 90° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" M. ACME-16 with Valve Core.
QC-E62	R134a 90° 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/2" M. ACME-16 with Valve Core.
QC-E2LH2	R1234yf 90° 1/2" F. ACME-16 LH with Gasket & Depressor x 1/2" M. ACME-16 with Valve Core.
QC-E2LH4	R1234yf 90° 1/2" F. ACME-16 LH with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE w/Valve Core.
QC-E2LH6	R1334yf 90° 1/2" F. ACME-16 LH with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-E42LH	R1234yf 90° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/2" M. ACME-16 LH with Valve Core.
QC-E62LH	R1234yf 90° 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/2" M. ACME-16 LH with Valve Core.
QC-E44	90° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 1/4" (7/16" 20UNF) M. SAE Flare with Valve Core.
QC-E46	90° 1/4" (7/16" 20UNF) F. SAE with Gasket & Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-E64	90° 3/8" (5/8" 18UNF) F. SAE with Gasket x 1/4" (7/16" 20UNF) M. SAE with Valve Core.
QC-E66	90° 3/8" (5/8" 18UNF) F. SAE with Gasket x 3/8" (5/8" 18UNF) M. SAE Flare.

### SPARE PARTS



42010



42024



A31999

Model	Description
42010	Neoprene Gasket for 1/4" (7/16" 20UNF) F. SAE.
42010T	Teflon Gasket for 1/4" (7/16" 20UNF) F. SAE.
42020	Neoprene Gasket for 1/2" Female ACME-16 and LH.
42020T	Teflon Gasket for 1/2" Female ACME-16 and LH.
42308	Neoprene Gasket for 3/8" (5/8" 18UNF) F. SAE.
42308T	Teflon Gasket for 3/8" (5/8" 18UNF) F. SAE.
42024	Valve Core Depressor.
A31999	Schrader Valve Core for 1/4" (7/16" 20UNF) M. SAE, 1/2" ACME-16 & 1/2" ACME-16 LH Male Service Ports.

Automotive Air Conditioning, Quick Couplers, Adaptor, Adapters with Access Valve Core, Access Port, Refrigerant CFC, HCFC, HFC R-12, R-22, R-134a, R-416a, Hot Shot resistant to alkalis and dilute mineral acids, adaptor, depressor, adapter 1/2" ACME-16 HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf, 1/4" SAE, 7/16" 20UNF male threaded Schrader, valve core Schrader, Adapter 1/4" Male SAE flare 7/16" 20UNF valve core Schrader, Straight, 45° bend, 90° bend for manifold gauge, Refrigerant Recovery unit, Refrigerant Charging unit, Refrigerant Recycling unit, vacuum pump connector, flexible refrigerant hoses, HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf Charging Hoses, vacuum gauge, Electronic Vacuum Gauge, Digital Vacuum Gauge, Dye and oil injector, refrigerant gas cylinders, refrigerant drum, Refrigerant Can, compound gauge, pressure gauge, ball valve HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf, R12, R22, R134a, R416a

Komponenten Kälte-Klima Klimatechnik Klimaanlage Klima-Service-Geräte, Bussen, recycell, HFKW, HFCKW, FCKW für R12, R22, R134a, R416a HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf, Anschluss Ventile Stutzen mit Isier Mutter, Übergangsstück mit Ventildrucker, Fülladapter 7/16" SAE, 5/8" SAE, HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf 1/2" ACME-16 mit Schrader-Ventil, Ersatzdichtung, Ersatzgummidichtung, Adapter 7/16" 20 UNF, aussen, innen, 5/8" 18UNF, NPT, Schlauchadapter, Reduktion, Ventilkerndrucker, Ventildrucker für Schrader Ventile, Neopren Dichtung, Gebogener Kupplung, Gebogene Anschlüsse r-12, r-22, r-134a, r-416a Kältemittel

Raccord clim-auto rapide droit, coude à poussoir d'intervention avec valve Schrader, et bague pour fluide réfrigérant; Mécanisme joint, CFC, HCFC, HFC, R12, R22, R134a, R416a, Raccord serrage manuel, Climatiseur, Tuyaux flexible de Charge, Coupleur d'accès rapide droit, Coupleur d'accès rapide équerre, Micro-valve raccord latéral mâle 1/4" flare, 3/8" flare, 1/2" ACME-16 avec cartouche valve Schrader, avec joint et dépressur, écrou femelle, sur flexible et micro-variantes manuellement, 1/4" SAE, 7/16" 20UNF, R1234yf, HFO1234yf 1/2" ACME-16 Si gauge raccord latéral R-1234yf, HFO-1234yf avec poussoir, 3/8" SAE, 1/8" briggs NPT, 1/8" briggs NPT avec vanne pour fluide réfrigérant, mâle CFC, HCFC, HFC, R-12, R-22, R-134a, R-416a

Auto sistema de Aire Acondicionado los gases inofensivos, refrigerante R12, R22, R134a, R416a, Adaptadores de carga, Adaptadores para carga, para plugs o vacío, con depressor conexiones 1/4" SAE macho, 1/4" SAE hembra, R-1234yf, HFO-1234yf hembra, 1/2" ACME-16 macho, R1234yf, HFO1234yf 3/8" SAE hembra Depressor, Fitting de entrada, valvula Alta Presion, Acoplamientos macho-macho, Rador, Conexión junta giratoria, tuercas giratorias, Rador para carga de instalaciones de aire acondicionado, para manguera de carga con valvula de servicio, Schrader par auto Aire Acondicionado plus les gases inofensivos r-12, r-22, r-416a, r-134a

Conexão HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf Conexões manutenção Sistema Automotivz Ar Condicionado para analisador de pressão e vácuo, Engate rápido para carga de pás manual, Garrafas para gás refrigerante, para técnicas Recuperadora, Depuração, reciclados, R12, R22, R134a, R416a, Mangueiras especiais para pás refrigerante HFO1234yf, HFO-1234yf, R-1234yf, HFO-1234yf, nas cores azul, amarela e vermelha, com aperto manual e rápida conexão com mscas, vacuú, Manômetro NPT, Orifício 1/4" SAE, 1/2" ACME-16, R-1234yf, HFO-1234yf, 3/8" SAE CFCs, HCFCs, ou HFCs misturas tais como R-12, r-22, r-134a, r-416a