

### QUICK SEAL CAPS with O-RING - Female SAE / 1/2" ACME-16



NFT5- 4

Model	Description
NFT5- 3	Finger Tight Brass Seal Cap 3/16" (3/8" 24UNF) Female SAE with Neoprene O-Ring.
NFT5- 4	1/4" (7/16" 20UNF) F. SAE.
<b>NEW</b> NFT5-2	R134a 1/2" F. ACME-16.
<b>NEW</b> NFT5-2LH	R1234yf 1/2" F. ACME-16 LH Left Hand.
NFT5- 6	3/8" ( 5/8" 18UNF) F. SAE.
NFT5- 8	1/2" ( 3/4" 16UNF) F. SAE.

### QUICK SEAL CAPS w/O-RING and VALVE CORE REMOVER - Female SAE



VC- 4R

Model	Description
VC- 3R	Brass Seal Cap 3/16" (3/8" 24UNF) Female SAE with Neoprene O-Ring and Valve Core Remover.
VC- 4R	1/4" (7/16" 20UNF) F. SAE.
<b>NEW</b> VC-2R	R134a 1/2" F. ACME-16.
<b>NEW</b> VC-2LH	R1234yf 1/2" F. ACME-16 LH Left Hand.
VC- 6	3/8" ( 5/8" 18UNF) F. SAE.
VC- 8	1/2" ( 3/4" 16UNF) F. SAE.

### HEX SEAL CAPS with COPPER FLARE GASKET



N5- 4

Model	Description
N5- 3	Brass Hex Seal Cap 3/16" (3/8" 20UNF) Female SAE with Copper Gasket.
N5- 4	1/4" (7/16" 20UNF) F. SAE w/Long Tan Copper Gasket
N5- 6	3/8" ( 5/8" 18UNF) F. SAE w/LTCG.
<b>Spare Parts</b>	
B2- 3	Copper Gasket for N5- 3.
B3- 4	Long Tan Copper Gasket for N5- 4.
B3- 6	Long Tan Copper Gasket for N5- 6.

### QUICK SEAL CAPS w/O-RING and PLASTIC RETAINER STRAP



NFT5- 4PR

Temperature -50° + +130° C.

Model	Description
NFT5- 4PB	Finger Tight Brass Seal Cap 1/4" (7/16" 20UNF) Female SAE with Neoprene O-Ring and Plastic Retainer Strap - Bleu (Low Pressure).
NFT5- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
NFT5- 4PW	1/4" (7/16" 20UNF) F. SAE - White.
<b>NEW</b> NFT5-2PW	R-134a 1/2" F. ACME-16 - White.
<b>NEW</b> NFT5-2LHPW	R-1234yf 1/2" F. ACME-16 LH Left Hand - White.
NFT5- 6PB	3/8" ( 5/8" 18UNF) F. SAE - Bleu (LP).
NFT5- 6PR	3/8" ( 5/8" 18UNF) F. SAE - Red (HP).
NFT5- 6PW	3/8" ( 5/8" 18UNF) F. SAE - White.

### QUICK SEAL CAPS w/O-RING, VALVE CORE REMOVER and PLASTIC RETAINER STRAP



VC- 4PB

Temperature -50° + +130° C.

Model	Description
VC- 4PB	Finger Tight Brass Seal Cap 1/4" (7/16" 20UNF) Fem. SAE w/Neoprene O-Ring, Valve Core Remover & Plastic Retainer Strap - Bleu (Low Pressure).
VC- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
VC- 4PW	1/4" (7/16" 20UNF) F. SAE - White.
<b>NEW</b> VC-2PW	R-134a 1/2" F. ACME-16 - White.
<b>NEW</b> VC-2LHPW	R-1234yf 1/2" F. ACME-16 LH Left Hand - White.
VC- 6PB	3/8" ( 5/8" 18UNF) F. SAE - Bleu (LP).
VC- 6PR	3/8" ( 5/8" 18UNF) F. SAE - Red (HP).
VC- 6PW	3/8" ( 5/8" 18UNF) F. SAE - White.

# Automotive Components

## SAE 45° & 1/2" ACME-16 SEAL CAPS / PLUGS



### HEX SEAL CAPS w/LONG TAN COIPPER GASKET and PLASTIC RETAINER STRAP - Female SAE

Temperature -50° + +130° C.




N5- 4PR

Model	Description
N5- 4PB	Brass Hex Seal Cap 1/4" Female SAE with Long Tan Copper Gasket and Plastic Retainer Strip - Bleu (Low Pressure).
N5- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (High Pressure).
N5- 4PW	1/4" (7/16" 20UNF) F. SAE - White UV resistant.
N5- 6PB	3/8" ( 5/8" 18UNF) F. SAE - Bleu (LP).
N5- 6PR	3/8" ( 5/8" 18UNF) F. SAE - Red (HP).
N5- 6PW	3/8" ( 5/8" 18UNF) F. SAE - White UV resistant.

### QUICK SEAL BRASS PLUGS - Male SAE with Neoprene O-RING and Plastic Retainer Strap

Temperature -50° + +130° C.



PFT2- 4ORPB

Model	Description
PFT2- 4ORPB	Finger Tight Brass Plug 1/4" Male SAE Flare with Neoprene O-Ring and Plastic Retainer Strap - Blue.
PFT2- 4ORPR	1/4" (7/16" 20UNF) M. SAE Flare - Red (HP).
PFT2- 4ORPW	1/4" (7/16" 20UNF) M. SAE Flare - White.
PFT2- 6ORPB	3/8" ( 5/8" 18UNF) M. SAE Flare - Blue (LP).
PFT2- 6ORPR	3/8" ( 5/8" 18UNF) M. SAE Flare - Red (HP).
PFT2- 6ORPW	3/8" ( 5/8" 18UNF) M. SAE Flare - White.

### SPARE PARTS




-107 MN

Model	Description
42003	Neoprene Gasket for 3/16" ( 3/8" 24UNF) F. SAE.
-107 MN	Neoprene O-Ring for 1/4" (7/16" 20UNF) F. SAE.
-108 MN	1/2" F. ACME-16 and LH.
-008 MN	3/8" ( 5/8" 18UNF) F. SAE.
P90008	Neoprene O-Ring for 1/4" (7/16" 20UNF) Male SAE.
P90021	3/8" ( 5/8" 18UNF) M. SAE.

PRS- 4B	Plastic Retainer Strap Blue for 1/4" F. SAE Caps.
PRS- 4R	Red for 1/4" (7/16" 20UNF) F. SAE Caps.
PRS- 4W	White for 1/4" (7/16" 20UNF) F. SAE Caps.
PRS- 5W	White for 1/2" F. ACME-16 and LH Caps.
PRS- 6B	Plastic Retainer Strap Blue for 3/8" F. SAE Caps.
PRS- 6R	Red for 3/8" ( 5/8" 18UNF) F. SAE Caps.
PRS- 6W	White for 3/8" ( 5/8" 18UNF) F. SAE Caps.

### QUICK SEAL BRASS PLUGS - Male SAE with Plastic Retainer Strap

Temperature -50° + +130° C.



PFT2- 5PR

Model	Description
PFT2- 4PB	Finger Tight Plug 1/4" (7/16" 20UNF) Male SAE with Plastic Retainer Strap - Blue (Low Pressure).
PFT2- 4PR	1/4" (7/16" 20UNF) M. SAE - Red (HP).
PFT2- 4PW	1/4" (7/16" 20UNF) M. SAE - White UV resistant.
PFT2- 6PB	3/8" ( 5/8" 18UNF) M. SAE - Blue.
PFT2- 6PR	3/8" ( 5/8" 18UNF) M. SAE - Red.
PFT2- 6PW	3/8" ( 5/8" 18UNF) M. SAE - White UV resistant.


### QUICK SEAL ALUMINUM CAPS - Female SAE Flare with Neoprene O-Ring



CP- 606

Model	Description
CP- 607	Quick Seal Aluminum Cap 1/8" F. SAE (5/16" 24UNF) with Neoprene O-Ring. R-12 HP on Ford 1977 to 1980.
CP- 604	3/16" F. SAE (3/8" 24UNF) with Neoprene O-Ring. R-12 HP on GM >1976.
CP- 606	1/4" (7/16" 20UNF) F. SAE. R-12, R-22... for Accumulator & Filter Drier on GM, Behr Bosch Axial Plate & Wing Cell Compressors / Diesel Kiki CH Series / Hitachi SWP123 & SWP167 / Heihin 150L & 150R / Mitsubishi FX80 & FX105V / Nippondenso 6P, 10P & Sanden SD7.
CP- 628	1/2" (3/4" 16UNF) F. SAE on Audi, Behr Bosch Axial Plate Compressors / Ford FS-6 & 6P148 / Hitachi MJ110, MJ123, MJ167 & SWP123 / Keihin 150L & 150R / Matsushita S1150 / Mitsubishi SA-430 2 cylinders / Nippondenso 2C78, 2C90, 6P127A, 6P127B, 6P127D, 6P134, 10P08E, 10P15A, 10P15C / Sanden SD5H13, SD5H14, SD7H15, SD-505, SD-507, SD-508, SD-510, SD-575 Mini, SD-708, SD-709 / Seiko Seiki / Zexel (Diesel Kiki) BH & CH / Unicla / Wankel / York YA 12/15 & Service Valve high side #8 (3/4" - 16).
CP- 630	5/8" F. SAE (7/8" 14UNF) on Audi, Behr Bosch Axial Plate compressors / Ford FS-6 & 6P148 / Hitachi MJ110, MJ123, MJ167 & SWP123 / Keihin 150L, 150R / Matsushita S1150 / Mitsubishi SA-430, 2 cylinders / Nippondenso 2C78, 2C90, 6P127A, 6P127B, 6P127D, 6P134, 10P08E, 10P15A, 10P15C / Sanden SD5H13, SD5H14, SD7H15, SD-505, SD-507, SD-508, SD-510, SD-575 Mini, SD-708, SD-709 / Seiko Seiki / Zexel (Diesel Kiki) BH & CH / Unicla - Wankel / York YA 12/15 & Service Valve low side #10 (7/8" - 14).

### QUICK SEAL ALUMINUM CAPS - Female SAE Flare with Neoprene O-Ring and Plastic Retainer Strap

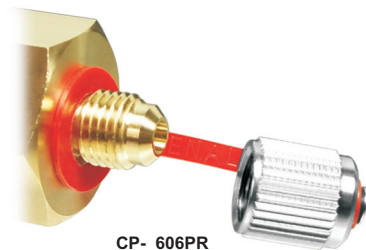

CP- 606PR

Model	Description
CP- 606PB	Finger Tight Aluminum Cap 1/4" (7/16" 20UNF) Female SAE with Neoprene O-Ring and Plastic Retainer Strap - Blue (Low Pressure).
CP- 606PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
CP- 606PW	1/4" (7/16" 20UNF) F. SAE - White.

### HEX ALUMINUM CAPS - Female SAE Flare with Long Tan Copper Gasket



N5A- 4

Model	Description
N5A- 3	Hex Aluminum Cap 3/16" (3/8" 24UNF) Female SAE Flare. R-12 High Pressure on GM >1976.
N5A- 4	1/4" (7/16" 20UNF) F. SAE Flare with Long Tan Copper Gasket.
N5A- 6	3/8" ( 5/8" 18UNF) F. SAE Flare w/ltcg.

### HEX ALUMINUM CAPS - Female SAE Flare with Long Tan Copper Gasket and Plastic Retainer Strap



N5A- 4PR

Temperature -50° + +130° C.

Model	Description
N5A- 4PB	Hex Aluminum Cap 1/4" (7/16" 20UNF) Female SAE Flare with Long Tan Copper Gasket and Plastic Retainer Strap - Blue (Low Pressure).
N5A- 4PR	1/4" (7/16" 20UNF) F. SAE Flare w/ltcg - Red (HP).
N5A- 4PW	1/4" (7/16" 20UNF) F. SAE Flare w/ltcg - White.
N5A- 6PB	3/8" ( 5/8" 18UNF) F. SAE Flare w/ltcg - Blue.
N5A- 6PR	3/8" ( 5/8" 18UNF) F. SAE Flare w/ltcg - Red.
N5A- 6PW	3/8" ( 5/8" 18UNF) F. SAE Flare w/ltcg - White.

### PLASTIC SEAL CAPS



Model	Description
CP- 605	Black Plastic Cap 3/16" (3/8" 24UNF) Female SAE with Neoprene O-Ring R-12 High Pressure on Chrysler / Jeep Europe / UK, Ford #E1VY-19D702A, Motorcraft #YF-970
CP- 616	Black 1/4" (7/16" 20UNF) F. SAE w/Neoprene O-Ring on Alfa Romeo, Audi / VW, BMW, Chrysler / Jeep Europe / UK, Citroen / Peugeot, Fiat, Ford Europe / UK #D20Z-19D702A, Jaguar, Mercedes, Opel / Vauxhall, Porsche, Renault, Rover, Saab / Volvo, Motorcraft #YF-880.
CP- 632	Black # 8 1/2" (3/4" 16UNF) F. SAE w/Neoprene O-Ring on Evaporators, Behr Bosch Axial Plate & Wing Cell discharge Compressors / Heihin 150L, 150R discharge / Sanden SD7H15 discharge / Seiko Seiki SS148PB & SS811PB5 discharge.
CP- 634	Black #10 5/8" (7/8" 14UNF) F. SAE w/Neoprene O-Ring on Evaporators, Accumulators GM Outlet, Behr Bosch Axial Plate Suction / Sanden SD7H15 Suction & Seiko Seiki SS148PB, SS811PB5 Suction.
CP- 649	Black 3/16" (3/8" 24UNF) F. SAE w/Neoprene O-Ring R-12 on GM Late Model.
CP- 650	Black Short Skirted Type 1/4" (7/16" 20UNF) F. SAE w/Neoprene O-Ring. R-12 on GM Accumulators.
CP- 651	Black F 13 mm. w/Neoprene Seal R-134a Low Side Access Port on GM Accumulators, Ford #F3A2-19D702B, Motorcraft #YF-2122.
82297	Blue F 13 mm. w/Neoprene Seal. R-134a Low Side Access Port.
CP- 653	Blue F 13 mm. w/Neoprene Seal R-134a Low Side with "L" marking. Bridgeport, Piedmont. Audi / VW, Chrysler / Jeep Europe / UK, Fiat, Hyundai, Isuzu, Jaguar, Lexus, Mazda, Mitsubishi, Opel / Vauxhall, Renault, Suzuki, Toyota, Trucks, Pickups, Farm Equipments, GM Accumulators, Ford #F3A2-19D702B, Motorcraft #YF-2122.
CP- 656	Blue F 13 mm. w/Neoprene Seal R-134a Low Side with Heavy Ribs on Alfa Romeo, BMW, Chrysler / Jeep Europe / UK, Citroen / Peugeot, Ford Europe / UK, Honda / Acura, Mercedes, Nissan, Porsche, Rover, Saab / Volvo, Subaru, Trucks, Pickups, Farm Equipments.
CP- 661	Green F 13 mm. w/Neoprene Seal R-134a High Flow Low Side Port on Aeroquip.
CP- 665	Blue F 13 mm. w/Neoprene Seal R-134a Low Side on JRA valve. Audi / VW, Ford Europe / UK, Nissan / Calsonic, Hyundai, Honda / Acura, Isuzu, Lexus, Mazda, Mitsubishi, Subaru, Suzuki & Toyota.
CP- 663	Black F 13 mm. w/Neoprene Seal R-134a Low Side on Eaton SSV & CCI High Flow valves, Trucks, Pickups, Farm Equipments.
CP- 652	Black F 16 mm. w/Neoprene Seal R-134a High Side on Ford #F4JY-19D702A, Motorcraft #YF-2070.
82379	Red F 16 mm. w/Neoprene Seal R-134a High Side
CP- 654	Red F 16 mm. w/Neoprene Seal R-134a High Side with "H" marking. Bridgeport, Piedmont. Audi / VW, Chrysler / Jeep Europe / UK, Fiat, Hyundai, Isuzu, Jaguar, Lexus, Mazda, Mitsubishi, Opel / Vauxhall, Renault, Suzuki, Toyota, Trucks, Pickups, Farm Equipments. Ford #F4JY-19D702A, Motorcraft #YF-2070.

CP- 657	Red F 16 mm. w/Neoprene Seal R-134a High Side with Heavy Ribs on Alfa Romeo, BMW, Chrysler / Jeep Europe / UK, Citroen, Peugeot, Ford Europe / UK, Honda / Acura, Mercedes, Nissan, Porsche, Rover, Saab / Volvo, Subaru, Trucks, Pickups, Farm Equipments.
CP- 662	Green F 16 mm. w/Neoprene Seal R-134a High Flow High Side Port on Aeroquip and Frig-C.
CP- 664	Black F 16 mm. w/Neoprene Seal R-134a High Side on Eaton SSV & CCI High Flow valves, Trucks, Pickups, Farm Equipments.
CP- 666	Red F 16 mm. w/Neoprene Seal R-134a High Side on JRA valve. Bridgeport, Piedmont, Audi / VW, Ford Europe / UK, Hyundai, Honda / Acura, Isuzu, Lexus, Mazda, Mitsubishi, Nissan / Calsonic, Subaru, Suzuki & Toyota.
<b>NEW</b> LSPC-13MMB	Blue Plastic Cap F 13 mm. - M8x1,0 mm. with Neoprene Seal R-134a Low Side Access Port.
<b>NEW</b> HSPC-16MMB	Red Plastic Cap F 16 mm. - M8x1,0 mm. with Neoprene Seal R-134a High Side Access Port.
<b>NEW</b> LSPC-13MMBPW	Blue Plastic Cap F 13 mm. - M8x1,0 mm. with Neoprene Seal & Plastic Retainer Strap - White R-134a Low Side Access Port.
<b>NEW</b> LSPC-16MMRPW	Red Plastic Cap F 16 mm. - M8x1,0 mm. with Neoprene Seal & Plastic Retainer Strap - White R-134a High Side Access Port.
<b>NEW</b> LSPC-14MM	Black Plastic Cap F 14 mm. - M8x1,0 mm. w/Neoprene Seal R-1234yf Low Side Access Port.
<b>NEW</b> HSPC-17MM	Black Plastic Cap F 17 mm. - M8x1,0 mm. w/Neoprene Seal R-1234yf High Side Access Port.
<b>NEW</b> LSPC-14MMPB	Black Plastic Cap F 14 mm. - M8x1,0 mm. with Neoprene Seal & Plastic Retainer Strap - Blue R-1234yf Low Side Access Port.
<b>NEW</b> HSPC-14MMPR	Black Plastic Cap F 17 mm. - M8x1,0 mm. with Neoprene Seal & Plastic Retainer Strap - Red R-1234yf High Side Access Port.