

REFRIGERANT DRUM HEX CAPS with GASKET



Typical application

Model	Description
K1-16	Cylinder Hex Seal Cap Female (21,7x1,814W France) - (W21,8x1/14" Germany, Nederland) with Gasket.
K1-17	1/2" Female NPSM (U.S.A.) with Gasket.
K1-18	3/4" Female NPSM (56 Kg. - 125 Lbs. & 65 Kg. - 145 Lbs. Drums U.S.A.) with Gasket.
K1-19	G 5/8" Female (UK) with Gasket.
K1-21	R-32 (21,7x1,814W LH SI gauche France), (W21,8x1/14" LH Germany, Nederland) w/Gasket. Flammable Gases
Spare Parts	
K1-F	Gasket for K1-16 and K1-21.
K1-G	Gasket for K1-17.
K1-H	Gasket for K1-18.
K1-I	Gasket for K1-19.


REFRIGERANT CYLINDER ADAPTERS



Model	Description
K1- 4	Refrigerant Drum Adapter Female (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) with Gasket x 3/8" (5/8" 18UNF) Male SAE Flare with Standard Seal Cap.
K1- 7	R410a F. (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) w/gasket x 5/16" (1/2" 20UNF) Male SAE Flare
K1-22	R32 F. (21,7x1,814W LH SI gauche France), (W21,8x1/14" LH Left Hand Germany, Nederland) w/gasket x 5/16" (1/2" 20UNF) LH Male SAE Flare with Standard Cap.
K1- 9	Female (21,7x1,814W France), (W21,8x1/14" Germany, Nederland) w/gasket x 1/4" (7/16" 20UNF) Male SAE Flare
K1-23	Female (21,7x1,814W LH SI gauche France), (W21,8x1/14" LH Germany, Nederland) w/gasket x 1/4" (7/16" 20 UNF) Male SAE Flare with Std Cap. Flammable Gases.
K1- 8	1/2" Female NPSM (U.S.A.) with Gasket x 1/4" (7/16" 20UNF) Male SAE Flare w/Seal Cap.
K1-85	R410a 1/2" Female NPSM (U.S.A.) with Gasket x 5/16" (1/2" 20UNF) Male SAE Flare with Seal Cap.
K1-86	1/2" Female NPSM (U.S.A.) with Gasket x 3/8" (5/8" 18UNF) Male SAE Flare with Seal Cap.
K1- 1	3/4" Female NPSM (56 Kg. -125 Lbs. & 65 Kg. -145 Lbs. Drums U.S.A.) with Gasket x 1/4" (7/16" 20UNF) Male SAE Flare with Seal Cap.

K1-15	R410a 3/4" Female NPSM with Gasket x 5/16" (1/2" 20UNF) Male SAE Flare with Seal Cap.
K1- 3	3/4" Female NPSM with Gasket x 3/8" (5/8" 18UNF) Male SAE Flare with Seal Cap.
K1- 5	3/4" Female NPSM with Gasket x 1/2" (3/4" 16UNF) Male SAE Flare with Seal Cap.
K1-13	G 5/8" Female (UK) with Gasket x 1/4" (7/16" 20UNF) Male SAE Flare with Seal Cap.
K1-14	R410a G 5/8" Female (UK) with Gasket x 5/16" (1/2" 20UNF) Male SAE Flare with Seal Cap.
K1-20	G 5/8" Female (UK) with Gasket x 3/8" (5/8" 20UNF) Male SAE Flare with Seal Cap.

REFRIGERANT CYLINDER ADAPTERS with SEAL CAP and RETAINER BEAD CHAIN or PLASTIC STRAP

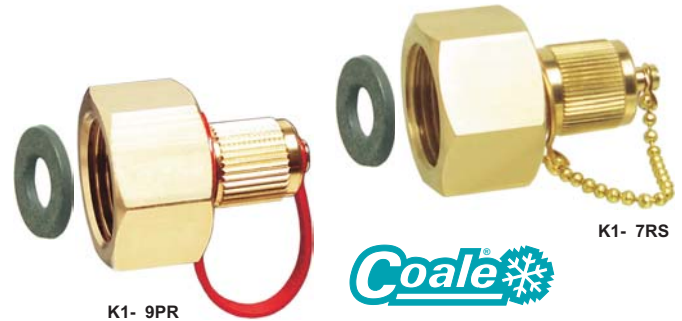

ENALT offers a complete line of K1 cylinder adapters for 45 degree SAE flare ports and Seal Cap with Neoprene O-Ring, Plastic Retainer Strap or Brass Retainer Bead Chain. Please add the following suffix to Standard K1- Models

- **PR Red - Liquid Phase;**
- **PB Blue - Vapor Phase;**
- **PN White - Neutral;**
- **RS Brass Retainer Bead Chain**

Spare Parts

K1-C	Gasket for K1- 4, K1- 7, K1- 9, K1-22 and K1-23.
K1-D	Gasket for K1- 8, K1-85, K1-86 1/2" Female NPSM.
K1-E	Gasket for K1- 1, K1-15, K1- 3, K1- 5 3/4" Female NPSM.
K1-A	Gasket for K1-13, K1-14, K1-20 G 5/8" Female.

CAN TAP VALVE



Model	Description
K1-10PN	Can Tap Valve Female M11x0,9 mm. with Neoprene O-Ring & Depressor x 1/4" (7/16" 20UNF) Male SAE with Cap and Plastic Retainer Strap - Neutral.
K1-11PN	R32 F. M11x0,9 mm. with Neoprene O-Ring & Depressor x 5/16" (1/2" 20UNF) LH Left Hand Male SAE with Cap and Plastic Retainer Strap - Neutral.