

QUICK SEAL CAPS with O-RING - Female SAE



NFT5- 4

Model	Description
NFT5- 4	Brass Seal Cap 1/4" (7/16" 20UNF) Female SAE with Neoprene O-Ring.
NFT5- 4LH	R290 1/4" (7/16" 20UNF) F. SAE LH Left Hand.
NFT5- 5	R410a, R32 5/16" (1/2" 20UNF) F. SAE.
NFT5- 5LH	R32 5/16" (1/2" 20UNF) F. SAE LH Left Hand.
NFT5- 6	3/8" (5/8" 18UNF) F. SAE.
NFT5- 8	1/2" (3/4" 16UNF) F. SAE.

QUICK SEAL CAPS with VALVE CORE REMOVER and NEOPRENE O-RING - Female SAE



VC- 4R

Model	Description
VC- 4R	Brass Seal Cap 1/4" (7/16" 20UNF) Female SAE with Valve Core Remover and Neoprene O-Ring.
VC- 4LHR	R290 1/4" (7/16" 20UNF) F. SAE LH Left Hand.
VC- 5R	R410a, R32 5/16" (1/2" 20UNF) F. SAE.
VC- 5LHR	R32 5/16" (1/2" 20UNF) F. SAE LH Left Hand.
VC- 6R	3/8" (5/8" 18UNF) F. SAE.
VC- 8R	1/2" (3/4" 16UNF) F. SAE.

HEX SEAL CAPS with LONG TAN COPPER GASKET - Female SAE



N5- 4

Model	Description
N5- 4	Brass Hex Seal Cap 1/4" (7/16" 20UNF) Female SAE with Long Tan Copper Gasket.
N5- 4LH	R290 1/4" (7/16" 20UNF) F. SAE LH Left Hand.
N5- 5	R410a, R32 5/16" (1/2" 20UNF) F. SAE.
N5- 5LH	R32 5/16" (1/2" 20UNF) F. SAE LH Left Hand.
N5- 6	3/8" (5/8" 18UNF) F. SAE.
N5- 8	1/2" (3/4" 16UNF) F. SAE.
Spare Parts	
B3- 4	Long Tan Copper Gasket for N5- 4 and - 4LH.
B3- 5	Long Tan Copper Gasket for N5- 5 and - 5LH.
B3- 6	Long Tan Copper Gasket for N5- 6.
B3- 8	Long Tan Copper Gasket for N5- 8.

QUICK SEAL CAPS with O-RING and PLASTIC RETAINER STRAP - Female SAE



NFT5- 4PR

Temperature -50° + +130° C.

Model	Description
NFT5- 4PB	Brass Seal Cap 1/4" (7/16" 20UNF) Female SAE with Neoprene O-Ring and Plastic Retainer Strap - Blue (Low Pressure).
NFT5- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
NFT5- 4PN	1/4" (7/16" 20UNF) F. SAE - Neutral.
NFT5-4LHPB	R290 1/4" (7/16" 20UNF) F. SAE LH - Blue (Vapor).
NFT5-4LHPR	R290 1/4" (7/16" 20UNF) F. SAE LH - Red (Liquid).
NFT5-4LHPN	R290 1/4" (7/16" 20UNF) F. SAE LH - Neutral.
NFT5- 5PB	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Blue (LP).
NFT5- 5PR	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Red (HP).
NFT5- 5PN	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Neutral.
NFT5-5LHPB	R32 5/16" (1/2" 20UNF) F. SAE LH - Blue (Vapor).
NFT5-5LHPR	R32 5/16" (1/2" 20UNF) F. SAE LH - Red (Liquid).
NFT5-5LHPN	R32 5/16" (1/2" 20UNF) F. SAE LH - Neutral.
NFT5- 6PB	3/8" (5/8" 18UNF) F. SAE - Blue (LP).
NFT5- 6PR	3/8" (5/8" 18UNF) F. SAE - Red (HP).
NFT5- 6PN	3/8" (5/8" 18UNF) F. SAE - Neutral.

QUICK SEAL CAPS with VALVE CORE REMOVER, NEOPRENE O-RING and PLASTIC RETAINER STRAP - Female SAE



VC- 4PB

Temperature -50° + +130° C.

Model	Description
VC- 4PB	Brass Seal Cap 1/4" (7/16" 20UNF) Female SAE with Valve Core Remover, Neoprene O-Ring and Plastic Retainer Strap - Blue (Low Pressure).
VC- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
VC- 4PN	1/4" (7/16" 20UNF) F. SAE - Neutral.
VC- 4LHPB	R290 1/4" F. SAE (7/16" 20UNF) LH - Blue (Vapor).
VC- 4LHPR	R290 1/4" F. SAE (7/16" 20UNF) LH - Red (Liquid).
VC- 4LHPN	R290 1/4" F. SAE (7/16" 20UNF) LH - Neutral.
VC- 5PB	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Blue (LP).
VC- 5PR	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Red (HP).
VC- 5PN	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Neutral.
VC- 5LHPB	R32 5/16" F. SAE (1/2" 20UNF) LH - Blue (Vapor).
VC- 5LHPR	R32 5/16" F. SAE (1/2" 20UNF) LH - Red (Liquid).
VC- 5LHPN	R32 5/16" F. SAE (1/2" 20UNF) LH - Neutral.

VC- 6PB	3/8" (5/8" 18UNF) F. SAE - Blue (LP).
VC- 6PR	3/8" (5/8" 18UNF) F. SAE - Red (HP).
VC- 6PN	3/8" (5/8" 18UNF) F. SAE - Neutral.

HEX SEAL CAPS w/LONG TAN COPPER GASKET and PLASTIC RETAINER STRAP - Female SAE



Model	Description
N5- 4PB	Brass Hex Seal Cap 1/4" Female SAE with Long Tan Copper Gasket and Plastic Retainer Strap - Bleu (Low Pressure).
N5- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
N5- 4PN	1/4" (7/16" 20UNF) F. SAE - Neutral.
N5-4LHPB	R290 1/4" (7/16" 20UNF) F. SAE LH - Blue (Vapor).
N5-4LHPR	R290 1/4" (7/16" 20UNF) F. SAE LH - Red (Liquid).
N5-4LHPN	R290 1/4" (7/16" 20UNF) F. SAE LH - Neutral.
N5- 5PB	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Blue (LP).
N5- 5PR	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Red (HP).
N5- 5PN	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Neutral.
N5-5LHPB	R32 5/16" (1/2" 20UNF) F. SAE LH - Blue (Vapor).
N5-5LHPR	R32 5/16" (1/2" 20UNF) F. SAE LH - Red (Liquid).
N5-5LHPN	R32 5/16" (1/2" 20UNF) F. SAE LH - Neutral.
N5- 6PB	3/8" (5/8" 18UNF) F. SAE - Blue (LP).
N5- 6PR	3/8" (5/8" 18UNF) F. SAE - Red (HP).
N5- 6PN	3/8" (5/8" 18UNF) F. SAE - Neutral.

SPARE PARTS



Model	Description
-107 MN	Neoprene O-Ring for 1/4" (7/16" 20UNF) Female SAE and LH Left Hand Caps.
-108 MN	5/16" (1/2" 20UNF) F. SAE and LH Left Hand.
-008 MN	3/8" (5/8" 18UNF) F. SAE.
-310 N	1/2" (3/4" 16UNF) F. SAE.
P90008	1/4" (7/16" 20UNF) M. SAE and LH Left Hand Plugs.
-008 MN	5/16" (1/2" 20UNF) M. SAE and LH Left Hand Plugs.
-108 MN	3/8" (5/8" 18UNF) M. SAE Plugs.

1/4" and 5/16" SCHRADER VALVE CORE


A refrigerant Schrader Valve Core is an assembly similar to a tire Valve Core, containing a spring and moveable core pin and seating details, suitably threaded for insertion into a refrigerant Access Valve Body to provide a normally closed valve arrangement suitable for use in a AC&R Air Conditioning or Refrigeration system. Depression of the core pin opens the valve.

- Valve Core in Stainless Steel and Brass;
- Teflon/Neoprene elastomers seal resistant to Refrigerant Oils : MO Mineral, AB AlkylBenzene, PAG PolyAlkylene Glycol, POE PolyOIEster sintetic, Alkalies and Diluite Mineral Acids;
- For all Refrigerants CFC, HCFC, HFC except Ammonia;
- Meet ARI American Rating Institute Standard 720-2002.

Max Working Pressure : 800 Psi (55 Bar);

Temperature Range : -20° ÷ 220° F. (-29° ÷ 105° C.);

Raccomended Torque : 3,0 ÷ 5,0 in/lbs (0,34 ÷ 0,57 N·m)



Model	Description
A31999	Schrader Valve Core for 1/4" (7/16" 20UNF), 5/16" (1/2" 20UNF) Male SAE and LH Left Hand Access Ports.


BRASS VALVE CORE DEPRESSORS

- For installation on AV4, AV4LH, AV5, AV5LH Adapters, CTR- 4 and CTR- 5 Copper Capillary Tubing;
- For permanent installations.

NOTE : Use VCR-1a Valve Core Remover/Installer Tool

Model	Description
42011	Schrader Valve Core Depressor for 1/4" (7/16" 20UNF) Female SAE and LH Left Hand with Long Tan Copper Gasket. For R1234ze(E), R134a, R290, R404a, R407c, R407f, R422a, R422b, R422c, R422d, R507a...
42021	R410a, R32 5/16" (1/2" 20UNF) F. SAE and LH.


FINGER TIGHT PLUGS with PLASTIC RETAINER STRAP - Male SAE

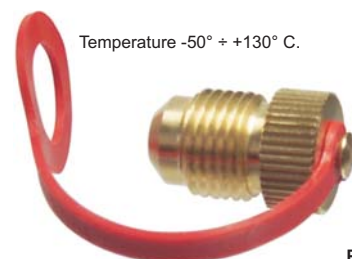

Model	Description
PFT2- 4PB	Finger Tight Plug 1/4" (7/16" 20UNF) Male SAE with Plastic Retainer Strap - Blue (Low Pressure).
PFT2- 4PR	1/4" (7/16" 20UNF) M. SAE - Red (HP).
PFT2- 4PN	1/4" (7/16" 20UNF) M. SAE - Neutral.
PFT2-4LHPB	1/4" (7/16" 20UNF) M. SAE LH - Blue. R290
PFT2-4LHPR	1/4" (7/16" 20UNF) M. SAE LH - Red. R290

PFT2-4LHPN	1/4" (7/16" 20UNF) M. SAE LH - Neutral. R290
PFT2- 5PB	5/16" (1/2" 20UNF) M. SAE - Blue. R410a, R32.
PFT2- 5PR	5/16" (1/2" 20UNF) M. SAE - Red. R410a, R32.
PFT2- 5PN	5/16" (1/2" 20UNF) M. SAE - Neutral. R410a, R32
PFT2-5LHPB	5/16" (1/2" 20UNF) M. SAE LH - Blue. R32
PFT2-5LHPR	5/16" (1/2" 20UNF) M. SAE LH - Red. R32
PFT2-5LHPN	5/16" (1/2" 20UNF) M. SAE LH - Neutral. R32
PFT2- 6PB	3/8" (5/8" 18UNF) M. SAE - Blue.
PFT2- 6PR	3/8" (5/8" 18UNF) M. SAE - Red.
PFT2- 6PN	3/8" (5/8" 18UNF) M. SAE - Neutral.

FINGER TIGHT PLUGS with NEOPRENE O-RING and PLASTIC RETAINER STRAP - Male SAE



PFT2- 4ORPB

Model	Description
PFT2- 4ORPB	Finger Tight Plug 1/4" (7/16" 20UNF) Male SAE with Neoprene O-Ring and Plastic Retainer Strap - Blue (Low Pressure).
PFT2- 4ORPR	1/4" (7/16" 20UNF) M. SAE - Red (High Pressure)
PFT2- 4ORPN	1/4" (7/16" 20UNF) M. SAE - Neutral.
PFT2-4LHORPB	1/4" (7/16" 20UNF) M. SAE LH - Blue. R290
PFT2-4LHORPR	1/4" (7/16" 20UNF) M. SAE LH - Red. R290
PFT2-4LHORPN	1/4" (7/16" 20UNF) M. SAE LH - Neutral. R290
PFT2- 5ORPB	5/16" (1/2" 20UNF) M. SAE - Blue. R410a, R32.
PFT2- 5ORPR	5/16" (1/2" 20UNF) M. SAE - Red. R410a, R32.
PFT2- 5ORPN	5/16" (1/2" 20UNF) M. SAE - Neutral. R410a, R32
PFT2-5LHORPB	5/16" (1/2" 20UNF) M. SAE LH - Blue. R32
PFT2-5LHORPR	5/16" (1/2" 20UNF) M. SAE LH - Red. R32
PFT2-5LHORPN	5/16" (1/2" 20UNF) M. SAE LH - Neutral. R32
PFT2- 6ORPB	3/8" (5/8" 18UNF) M. SAE - Blue.
PFT2- 6ORPR	3/8" (5/8" 18UNF) M. SAE - Red.
PFT2- 6ORPN	3/8" (5/8" 18UNF) M. SAE - Neutral.