

### QUICK SEAL CAPS with O-RING - Female SAE



NFT5- 4

Model	Description
NFT5- 4	Brass Finger Tight Seal Cap 1/4" (7/16" 20UNF) Female SAE with Neoprene O-Ring.
NFT5- 4LH	R290 1/4" (7/16" 20UNF) F. SAE LH Left Hand.
NFT5- 5	R410a, R32 5/16" (1/2" 20UNF) F. SAE.
NFT5- 5LH	R32 5/16" (1/2" 20UNF) F. SAE LH Left Hand.
NFT5- 6	3/8" (5/8" 18UNF) F. SAE.
NFT5- 8	1/2" (3/4" 16UNF) F. SAE.


### QUICK SEAL CAPS with VALVE CORE REMOVER and NEOPRENE O-RING - Female SAE



VC- 4R

Model	Description
VC- 4R	Brass Finger Tight Seal Cap 1/4" (7/16" 20UNF) Female SAE w/Valve Core Remover, Neoprene O-Ring
VC- 4LHR	R290 1/4" (7/16" 20UNF) F. SAE LH Left Hand.
VC- 5R	R410a, R32 5/16" (1/2" 20UNF) F. SAE.
VC- 5LHR	R32 5/16" (1/2" 20UNF) F. SAE LH Left Hand.
VC- 6R	3/8" (5/8" 18UNF) F. SAE.
VC- 8R	1/2" (3/4" 16UNF) F. SAE.

### HEX SEAL CAPS with LONG TAN COPPER GASKET - Female SAE



N5- 4

Model	Description
N5- 4	Brass Hex Seal Cap 1/4" (7/16" 20UNF) Female SAE with Long Tan Copper Gasket.
N5- 4LH	R290 1/4" (7/16" 20UNF) F. SAE LH Left Hand.
N5- 5	R410a, R32 5/16" (1/2" 20UNF) F. SAE.
N5- 5LH	R32 5/16" (1/2" 20UNF) F. SAE LH Left Hand.
N5- 6	3/8" (5/8" 18UNF) F. SAE.
N5- 8	1/2" (3/4" 16UNF) F. SAE.
<b>Spare Parts</b>	
B3- 4	Long Tan Copper Gasket for N5- 4 and - 4LH.
B3- 5	Long Tan Copper Gasket for N5- 5 and - 5LH.
B3- 6	Long Tan Copper Gasket for N5- 6.
B3- 8	Long Tan Copper Gasket for N5- 8.

### QUICK SEAL CAPS with O-RING and PLASTIC RETAINER STRAP - Female SAE




NFT5- 4PR

Temperature -50° + +130° C.

Model	Description
NFT5- 4PB	Brass Finger Tight Seal Cap 1/4" (7/16" 20UNF) Female SAE with Neoprene O-Ring and Plastic Retainer Strap - Blue (Low Pressure).
NFT5- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
NFT5- 4PW	1/4" (7/16" 20UNF) F. SAE - White.
NFT5-4LHPB	R290 1/4" (7/16" 20UNF) F. SAE LH - Blue (Vapor).
NFT5-4LHPR	R290 1/4" (7/16" 20UNF) F. SAE LH - Red (Liquid).
NFT5-4LHPW	R290 1/4" (7/16" 20UNF) F. SAE LH - White.
NFT5- 5PB	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Blue (LP).
NFT5- 5PR	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Red (HP).
NFT5- 5PW	R410a, R32 5/16" (1/2" 20UNF) F. SAE - White.
NFT5-5LHPB	R32 5/16" (1/2" 20UNF) F. SAE LH - Blue (Vapor).
NFT5-5LHPR	R32 5/16" (1/2" 20UNF) F. SAE LH - Red (Liquid).
NFT5-5LHPW	R32 5/16" (1/2" 20UNF) F. SAE LH - White.
NFT5- 6PB	3/8" ( 5/8" 18UNF) F. SAE - Blue (LP).
NFT5- 6PR	3/8" ( 5/8" 18UNF) F. SAE - Red (HP).
NFT5- 6PW	3/8" ( 5/8" 18UNF) F. SAE - White.

### QUICK SEAL CAPS with VALVE CORE REMOVER, NEOPRENE O-RING and PLASTIC RETAINER STRAP - Female SAE



VC- 4PB

Temperature -50° + +130° C.

Model	Description
VC- 4PB	Brass Finger Tight Seal Cap 1/4" (7/16" 20UNF) Female SAE w/Valve Core Remover, Neoprene O-Ring & Plastic Retainer Strap - Blue (Low Pressure).
VC- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
VC- 4PW	1/4" (7/16" 20UNF) F. SAE - White.
VC- 4LHPB	R290 1/4" F. SAE (7/16" 20UNF) LH - Blue (Vapor).
VC- 4LHPR	R290 1/4" F. SAE (7/16" 20UNF) LH - Red (Liquid).
VC- 4LHPW	R290 1/4" F. SAE (7/16" 20UNF) LH - White.
VC- 5PB	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Blue (LP).
VC- 5PR	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Red (HP).
VC- 5PW	R410a, R32 5/16" (1/2" 20UNF) F. SAE - White.
VC- 5LHPB	R32 5/16" F. SAE (1/2" 20UNF) LH - Blue (Vapor).
VC- 5LHPR	R32 5/16" F. SAE (1/2" 20UNF) LH - Red (Liquid).
VC- 5LHPW	R32 5/16" F. SAE (1/2" 20UNF) LH - White.

VC- 6PB	3/8" ( 5/8" 18UNF) F. SAE - Blue (LP).
VC- 6PR	3/8" ( 5/8" 18UNF) F. SAE - Red (HP).
VC- 6PW	3/8" ( 5/8" 18UNF) F. SAE - White.

### HEX SEAL CAPS w/LONG TAN COPPER GASKET and PLASTIC RETAINER STRAP - Female SAE



Temperature -50° + +130° C.

N5- 5PR

Model	Description
N5- 4PB	Brass Hex Seal Cap 1/4" Female SAE with Long Tan Copper Gasket and Plastic Retainer Strap - Bleu (Low Pressure).
N5- 4PR	1/4" (7/16" 20UNF) F. SAE - Red (HP).
N5- 4PW	1/4" (7/16" 20UNF) F. SAE - White.
N5-4LHPB	R290 1/4" (7/16" 20UNF) F. SAE LH - Blue (Vapor).
N5-4LHPR	R290 1/4" (7/16" 20UNF) F. SAE LH - Red (Liquid).
N5-4LHPW	R290 1/4" (7/16" 20UNF) F. SAE LH - White.
N5- 5PB	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Blue (LP).
N5- 5PR	R410a, R32 5/16" (1/2" 20UNF) F. SAE - Red (HP).
N5- 5PW	R410a, R32 5/16" (1/2" 20UNF) F. SAE - White.
N5-5LHPB	R32 5/16" (1/2" 20UNF) F. SAE LH - Blue (Vapor).
N5-5LHPR	R32 5/16" (1/2" 20UNF) F. SAE LH - Red (Liquid).
N5-5LHPW	R32 5/16" (1/2" 20UNF) F. SAE LH - White.
N5- 6PB	3/8" ( 5/8" 18UNF) F. SAE - Blue (LP).
N5- 6PR	3/8" ( 5/8" 18UNF) F. SAE - Red (HP).
N5- 6PW	3/8" ( 5/8" 18UNF) F. SAE - White.

### SPARE PARTS



-107 MN

Model	Description
-107 MN	Neoprene O-Ring for 1/4" (7/16" 20UNF) Female SAE and LH Left Hand Caps.
-108 MN	5/16" (1/2" 20UNF) F. SAE and LH Left Hand.
-008 MN	3/8" (5/8" 18UNF) F. SAE.
-310 N	1/2" (3/4" 16UNF) F. SAE.
P90008	1/4" (7/16" 20UNF) M. SAE and LH Left Hand.
-008 MN	5/16" ( 1/2" 20UNF) M. SAE and LH Left Hand.
-108 MN	3/8" ( 5/8" 18UNF) M. SAE Plugs.

### 1/4" and 5/16" SCHRADER VALVE CORE


A refrigerant Schrader Valve Core is an assembly similar to a tire Valve Core, containing a spring and moveable core pin and seating details, suitably threaded for insertion into a refrigerant Access Valve Body to provide a normally closed valve arrangement suitable for use in a AC&R Air Conditioning or Refrigeration system. Depression of the core pin opens the valve.

- Valve Core in Stainless Steel and Brass;
- Teflon/Neoprene elastomers seal resistant to Refrigerant Oils : MO Mineral, AB AlkylBenzene, PAG PolyAlkylene Glycol, POE PolyOIEster sintetic, Alkalies and Diluite Mineral Acids;
- For all Refrigerants CFC, HCFC, HFC except Ammonia;
- Meet ARI American Rating Institute Standard 720-2002.

**Max Working Pressure** : 800 Psi (55 Bar);

**Temperature Range** : -20° ÷ 220° F. (-29° ÷ 105° C.);

**Raccomended Torque** : 3,0 ÷ 5,0 in/lbs (0,34 ÷ 0,57 N·m)



A31999

Model	Description
A31999	Schrader Valve Core for 1/4" (7/16" 20UNF), 5/16" (1/2" 20UNF) Male SAE and LH Left Hand Access Ports.


### BRASS VALVE CORE DEPRESSORS

- For installation on AV4, AV4LH, AV5, AV5LH Adapters, CTR- 4 and CTR- 5 Copper Capillary Tubing;
- For permanent installations.

**NOTE** : Use VCR-1a Valve Core Remover/Installer Tool

Model	Description
42011	Schrader Valve Core Depressor for 1/4" (7/16" 20UNF) Female SAE and LH Left Hand with Long Tan Copper Gasket. For R1234ze(E), R134a, R290, R404a, R407c, R407f, R422a, R422b, R422c, R422d, R507a...
42021	R410a, R32 5/16" (1/2" 20UNF) F. SAE and LH.

### FINGER TIGHT SEAL PLUGS with PLASTIC RETAINER STRAP - Male SAE

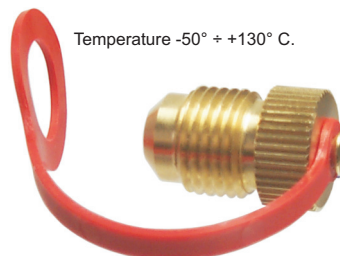


Temperature -50° + +130° C.

PFT2- 5PR

Model	Description
PFT2- 4PB	Finger Tight Plug 1/4" (7/16" 20UNF) Male SAE with Plastic Retainer Strap - Blue (Low Pressure).
PFT2- 4PR	1/4" (7/16" 20UNF) M. SAE - Red (HP).
PFT2- 4PW	1/4" (7/16" 20UNF) M. SAE - White.
PFT2-4LHPB	1/4" (7/16" 20UNF) M. SAE LH - Blue. R290
PFT2-4LHPR	1/4" (7/16" 20UNF) M. SAE LH - Red. R290

PFT2-4LHPW	1/4" (7/16" 20UNF) M. SAE LH - White. R290
PFT2- 5PB	5/16" ( 1/2" 20UNF) M. SAE - Blue. R410a, R32.
PFT2- 5PR	5/16" ( 1/2" 20UNF) M. SAE - Red. R410a, R32.
PFT2- 5PW	5/16" ( 1/2" 20UNF) M. SAE - White. R410a, R32
PFT2-5LHPB	5/16" (1/2" 20UNF) M. SAE LH - Blue. R32
PFT2-5LHPR	5/16" (1/2" 20UNF) M. SAE LH - Red. R32
PFT2-5LHPW	5/16" (1/2" 20UNF) M. SAE LH - White. R32
PFT2- 6PB	3/8" ( 5/8" 18UNF) M. SAE - Blue.
PFT2- 6PR	3/8" ( 5/8" 18UNF) M. SAE - Red.
PFT2- 6PW	3/8" ( 5/8" 18UNF) M. SAE - White.

### FINGER TIGHT SEAL PLUGS with NEOPRENE O-RING and PLASTIC RETAINER STRAP - Male SAE

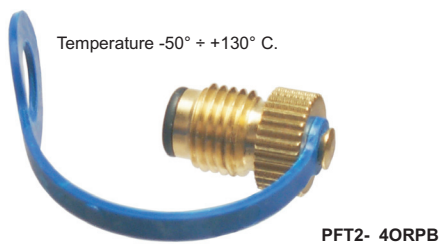

Model	Description
PFT2- 4ORPB	Finger Tight Plug 1/4" (7/16" 20UNF) Male SAE with Neoprene O-Ring and Plastic Retainer Strap - Blue (Low Pressure).
PFT2- 4ORPR	1/4" (7/16" 20UNF) M. SAE - Red (High Pressure)
PFT2- 4ORPW	1/4" (7/16" 20UNF) M. SAE - White.
PFT2-4LHORPB	1/4" (7/16" 20UNF) M. SAE LH - Blue. R290
PFT2-4LHORPR	1/4" (7/16" 20UNF) M. SAE LH - Red. R290
PFT2-4LHORPW	1/4" (7/16" 20UNF) M. SAE LH - White. R290
PFT2- 5ORPB	5/16" ( 1/2" 20UNF) M. SAE - Blue. R410a, R32.
PFT2- 5ORPR	5/16" ( 1/2" 20UNF) M. SAE - Red. R410a, R32.
PFT2- 5ORPW	5/16" ( 1/2" 20UNF) M. SAE - White. R410a, R32
PFT2-5LHORPB	5/16" (1/2" 20UNF) M. SAE LH - Blue. R32
PFT2-5LHORPR	5/16" (1/2" 20UNF) M. SAE LH - Red. R32
PFT2-5LHORPW	5/16" (1/2" 20UNF) M. SAE LH - White. R32
PFT2- 6ORPB	3/8" ( 5/8" 18UNF) M. SAE - Blue.
PFT2- 6ORPR	3/8" ( 5/8" 18UNF) M. SAE - Red.
PFT2- 6ORPW	3/8" ( 5/8" 18UNF) M. SAE - White.

ACAR Schroeder Valve Core HVACAR Schroeder Valve Core Brass Caps for Access Service Port 1/4" SAE Flare (7/16" 20UNF) with SAE Flare (1/2" 20UNF) for R410a R-410a R-32 R32 HFC32 HFC32 Refrigerant HVAC ACAR Brass caps for systems Access Valves Brass Plug with O-Ring for Seal Cutoff Line Vapor seal Supply line Inlet 1/4" SAE Flare (7/16" 20UNF) Swivel Nut 1/4" SAE Flare swivel Nut Schroeder valve cores Air Conditioning Refrigeration Cap for Access service Port to system 1/4" SAE Flare with 1/2" 20UNF SAE Flare (1/2" 20UNF) HCFC, HFC, HFO refrigerants R 134a, R-404a, R-407c, R-407h, R-410a, R-507 New refrigerant R-32, R32, HFC-32, HFO-32, R1234ze, R-1234ze, R-452a, R-452a, XPM, HVACAR Brass Quick Seal Caps, Finger Tight Brass Cap with Core remover and brass bead chain, Plastic Retainer Strap Air conditioning Refrigeration Caps 5/16" Female SAE Left Hand Thread 1/2" 20UNF brass caps Heat pumps Hex Caps with copper nuts 3/16" Male SAE 45" Female

Komponenten für die Kältetechnik Übergangstück mit Ventildrucker Kälte-Klima Werkzeuge und Komponenten FCKW, HFKW, HFCKW Auto-Klimatechnik, Klimaanlage, Klimaanlagen Kältemittel blau, rot, gelb, Kälte-Klima Werkzeuge und Komponenten Schnellverschlusskappen, Kappen mit Dichtung 1/4" SAE (7/16" 20UNF), 5/16" SAE (1/2" 20UNF), 3/8" SAE (5/8" 18UNF), 1/2" SAE (1/2" 20UNF), 5/8" SAE (3/4" 18UNF), Ventilkappe, Verschlussstopfen, FCKW, HFKW, HFCW R1234ze, R-1234ze, R-134a, R134a, R404a, R-404a, R-407c, R-407h, R-407h, R-410a, R-410a, R-452a, R-452a, XPM, Vanne Schroeder à la sortie latérale plus Schroeder, Bouchon à laiton normal, bouchon mâle avec vanne à deux filets, bouchon avec O-Ring démonteur, Dépresseurs, buses, Dépresseurs, vanne Schroeder Intervention.

Climatisation, corps valve Schroeder pour fluide réfrigérant R407c UNF mâle SAE (7/16" 20UNF) R1234ze, R-1234ze, R32, Bouchon de la climatisation et du froid, Bouchon femelle en laiton pour vanne Schroeder de service R32/ R-32 mâle SAE (1/2" 20UNF) R-32, R-32, HFC-32, HFO-32, R-407c, R-407h, R-410a, R-410a, R-452a, R-452a, XPM, vanne Schroeder à la sortie latérale plus Schroeder, Bouchon en laiton normal, bouchon mâle avec vanne à deux filets, bouchon avec O-Ring démonteur, Dépresseurs, buses, Dépresseurs, vanne Schroeder Intervention.

Aire Acondicionado, tapon Grafiado tampones embra con llave 1/4" SAE (7/16" 20UNF), 5/16" SAE (1/2" 20UNF), 3/8" SAE (5/8" 18UNF), 1/2" SAE, los gases frigoríficos R-407h, R-407h, R-410a, R-410a, R-452a, R-452a, R32, R-32, HFC32, HFO-32, tapon normal, tapon con llave desmontar para válvulas de buses, tapones Grafiado macho SAE Aire Acondicionado.