

### PRECISION BORE SOFT COPPER CAPILLARY TUBING

Only five sizes of capillary tubing are needed to fit any 1/8 to 2 HP commercial and domestic refrigerator or RAC Room Air Conditioner.

- Replace any original capillary tubing;
- ID within  $\pm 0,001''$  ( $\pm 0,025$  mm.);
- Conforms to ASTM B360-88 Specifications (Except Model TC-59x2,80).



TC- 59-10 (3,0 m.)

Model	Description
TC- 26-16	Soft Copper Capillary Tube <b>0,026''</b> (0,66 mm.) ID Inside Diameter x <b>0,072''</b> (1,83 mm.) OD Outside Diameter - Length <b>16'</b> (4,8 m.).
TC- 31-12	<b>0,031''</b> (0,79 mm.) ID x <b>0,083''</b> (2,11 mm.) OD/12' (3,6 m.)
TC- 36-12	<b>0,036''</b> (0,91 mm.) ID x <b>0,087''</b> (2,21 mm.) OD/12' (3,6 m.)
TC- 42-12	<b>0,042''</b> (1,07 mm.) ID x <b>0,093''</b> (2,47 mm.) OD/12' (3,6 m.)
TC- 44-12	<b>0,044''</b> (1,12 mm.) ID x <b>0,109''</b> (2,77 mm.) OD/12' (3,6 m.)
TC- 49-11	<b>0,049''</b> (1,24 mm.) ID x <b>0,099''</b> (2,51 mm.) OD/11' (3,3 m.)
TC- 50-11	<b>0,050''</b> (1,27 mm.) ID x <b>0,114''</b> (2,90 mm.) OD/11' (3,3 m.)
TC- 54-11	<b>0,054''</b> (1,37 mm.) ID x <b>0,106''</b> (2,69 mm.) OD/11' (3,3 m.)
TC- 55-11	<b>0,055''</b> (1,40 mm.) ID x <b>0,125''</b> (3,18 mm.) OD/11' (3,3 m.)
TC- 59x2,80	<b>0,059''</b> (1,50 mm.) ID x <b>0,110''</b> (2,80 mm.) OD/10' (3,0 m.)
TC- 59-10	<b>0,059''</b> (1,49 mm.) ID x <b>0,112''</b> (2,84 mm.) OD/10' (3,0 m.)
TC- 64-10	<b>0,064''</b> (1,63 mm.) ID x <b>0,125''</b> (3,18 mm.) OD/10' (3,0 m.)
TC- 70-12	<b>0,070''</b> (1,78 mm.) ID x <b>0,125''</b> (3,18 mm.) OD/12' (3,6 m.)
TC- 75- 9	<b>0,075''</b> (1,91 mm.) ID x <b>0,125''</b> (3,18 mm.) OD/ 9' (2,7 m.)
TC- 80-10	<b>0,080''</b> (2,03 mm.) ID x <b>0,145''</b> (3,68 mm.) OD/10' (3,0 m.)
TC- 85- 9	<b>0,085''</b> (2,16 mm.) ID x <b>0,145''</b> (3,68 mm.) OD/ 9' (2,7 m.)
TC- 90- 7	<b>0,090''</b> (2,29 mm.) ID x <b>0,145''</b> (3,68 mm.) OD/ 7' (2,1 m.)
TC-100-10	<b>0,100''</b> (2,54 mm.) ID x <b>0,156''</b> (3,96 mm.) OD/10' (3,0 m.)

NOTE : Add suffix -100 for 100' (30,4 m) coils.

### HEAVY DUTY SOFT COPPER CAPILLARY TUBING


- For all CFC, HCFC, HFC, HFO refrigerants (except Ammonia R-717);
- Soft copper capillary tube 0,059'' (1,50 mm.) ID Inside Diameter x 0,110'' (2,80 mm.) OD Outside Diameter;
- Reusable, long lasting, 1/4'' (7/16'' 20UNF) or 5/16'' (1/2'' 20UNF) Female SAE Flare swivel nut with replaceable B3 Long Tan Copper Gasket.



CTR- 5D 4-15

Model	Description
CTR- 4 4-05	Soft Copper Capillary Tube <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE Flare</b> swivel nut with Long Tan Copper Gasket B3 x <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE Flare</b> swivel nut with Long Tan Copper Gasket B3 - Length <b>20''</b> (0,5 m.)
CTR- 4 4-10	<b>1/4'' F. SAE</b> x <b>1/4'' F. SAE</b> - <b>40''</b> (1,0 m.)
CTR- 4 4-15	<b>1/4'' F. SAE</b> x <b>1/4'' F. SAE</b> - <b>60''</b> (1,5 m.)
CTR- 4 4-20	<b>1/4'' F. SAE</b> x <b>1/4'' F. SAE</b> - <b>80''</b> (2,0 m.)
CTR- 4D 4-05	Soft Copper Capillary Tube <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE Flare</b> swivel nut with Long Tan Copper Gasket B3 & Depressor x <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE Flare</b> swivel nut with Long Tan Copper Gasket B3 - Length <b>20''</b> (0,5 m.)
CTR- 4D 4-10	<b>1/4'' F. SAE</b> x <b>1/4'' F. SAE</b> - <b>40''</b> (1,0 m.)
CTR- 4D 4-15	<b>1/4'' F. SAE</b> x <b>1/4'' F. SAE</b> - <b>60''</b> (1,5 m.)
CTR- 4D 4-20	<b>1/4'' F. SAE</b> x <b>1/4'' F. SAE</b> - <b>80''</b> (2,0 m.)
CTR- 5D 4-05	Soft Copper Capillary Tube <b>5/16''</b> (1/2'' 20UNF) <b>Female SAE Flare</b> swivel nut with Long Tan Copper Gasket B3 & Depressor x <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE Flare</b> swivel nut with Long Tan Copper Gasket B3 - Length <b>20''</b> (0,5 m.) for <b>R-410a, R-32</b> .
CTR- 5D 4-10	<b>5/16'' F. SAE</b> x <b>1/4'' F. SAE</b> - 1,0 m. <b>R-410a, R-32</b>
CTR- 5D 4-15	<b>5/16'' F. SAE</b> x <b>1/4'' F. SAE</b> - 1,5 m. <b>R-410a, R-32</b>
CTR- 5D 4-20	<b>5/16'' F. SAE</b> x <b>1/4'' F. SAE</b> - 2,0 m. <b>R-410a, R-32</b>

### ACCESSORIES / SPARE PARTS

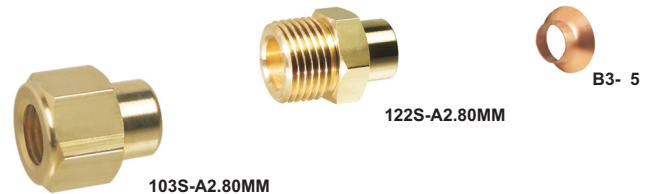

Model	Description
CTR04N	Heavy Duty Swivel Nut <b>1/4''</b> (7/16'' 20UNF) <b>Fem. SAE</b>
CTR05N	<b>5/16''</b> (1/2'' 20UNF) <b>F. SAE. R-410a, R-32.</b>
CTR04	Solder Brass Ferrure <b>1/4'' F. SAE</b> x <b>2,80 mm.</b> ODS.
CTR05	<b>5/16'' F. SAE</b> x <b>2,80 mm.</b> ODS <b>R-410a, R-32.</b>
103S-A2.80MM	Adapter <b>1/8'' Female NPT</b> x <b>2,80 mm.</b> ODS solder.
122S-A2.80MM	Adapter <b>1/8'' Male NPT</b> x <b>2,80 mm.</b> ODS solder.
B3- 4	Long Tan Copper Gasket for <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE.</b>
B3- 5	<b>5/16''</b> (1/2'' 20UNF) <b>F. SAE. R-410a, R-32.</b>
D3- 4	Brass Depressor <b>1/4''</b> (7/16'' 20UNF) <b>Female SAE.</b>
D3- 5	<b>5/16''</b> (1/2'' 20UNF) <b>F. SAE. R-410a, R-32.</b>