

PRECISION BORE SOFT COPPER CAPILLARY TUBING

Only five sizes of capillary tubing are needed to fit any 1/8 to 2 HP commercial and domestic refrigerator or RAC Room Air Conditioner.

- Replace any original capillary tubing;
- ID within $\pm 0,001''$ ($\pm 0,025$ mm.);
- Conforms to ASTM B360-88 Specifications (Except Model TC-59).



TC- 59-10 (3,0 m.)

Model	Description
TC- 26-16	Soft Copper Capillary Tube 0,026'' (0,66 mm.) ID Inside Diameter x 0,072'' (1,83 mm.) OD Outside Diameter - Length 16' (4,8 m.).
TC- 31-12	0,031'' (0,79 mm.) ID x 0,083'' (2,11 mm.) OD/12' (3,6 m.)
TC- 36-12	0,036'' (0,91 mm.) ID x 0,087'' (2,21 mm.) OD/12' (3,6 m.)
TC- 42-12	0,042'' (1,07 mm.) ID x 0,093'' (2,47 mm.) OD/12' (3,6 m.)
TC- 44-12	0,044'' (1,12 mm.) ID x 0,109'' (2,77 mm.) OD/12' (3,6 m.)
TC- 49-11	0,049'' (1,24 mm.) ID x 0,099'' (2,51 mm.) OD/11' (3,3 m.)
TC- 50-11	0,050'' (1,27 mm.) ID x 0,114'' (2,90 mm.) OD/11' (3,3 m.)
TC- 54-11	0,054'' (1,37 mm.) ID x 0,106'' (2,69 mm.) OD/11' (3,3 m.)
TC- 55-11	0,055'' (1,40 mm.) ID x 0,125'' (3,18 mm.) OD/11' (3,3 m.)
TC- 59-10	0,059'' (1,50 mm.) ID x 0,112'' (2,84 mm.) OD/10' (3,0 m.)
TC- 64-10	0,064'' (1,63 mm.) ID x 0,125'' (3,18 mm.) OD/10' (3,0 m.)
TC- 70-12	0,070'' (1,78 mm.) ID x 0,125'' (3,18 mm.) OD/12' (3,6 m.)
TC- 75- 9	0,075'' (1,91 mm.) ID x 0,125'' (3,18 mm.) OD/ 9' (2,7 m.)
TC- 80-10	0,080'' (2,03 mm.) ID x 0,145'' (3,68 mm.) OD/10' (3,0 m.)
TC- 85- 9	0,085'' (2,16 mm.) ID x 0,145'' (3,68 mm.) OD/ 9' (2,7 m.)
TC- 90- 7	0,090'' (2,29 mm.) ID x 0,145'' (3,68 mm.) OD/ 7' (2,1 m.)
TC-100-10	0,100'' (2,54 mm.) ID x 0,156'' (3,96 mm.) OD/10' (3,0 m.)

NOTE : Add suffix -100 for 100' (30,4 m) coils.

HEAVY DUTY SOFT COPPER CAPILLARY TUBING


- For all CFC, HCFC, HFC, HFO refrigerants (except Ammonia R-717);
- Soft copper capillary tube 0,059'' (1,50 mm.) ID Inside Diameter x 0,112'' (2,84 mm.) OD Outside Diameter;
- Reusable, long lasting, 1/4'' (7/16'' 20UNF) or 5/16'' (1/2'' 20UNF) Female SAE Flare swivel nut with replaceable B3 Long Tan Copper Gasket and Depressor.



CTR- 5D 4-15

Model	Description
CTR- 4 4-05	Soft Copper Capillary Tube 1/4'' (7/16'' 20UNF) Female SAE Flare swivel nut with Long Tan Copper Gasket B3 x 1/4'' (7/16'' 20UNF) Female SAE Flare swivel nut with Long Tan Copper Gasket B3 - Length 20'' (0,5 m.)
CTR- 4 4-10	1/4'' F. SAE x 1/4'' F. SAE - 40'' (1,0 m.)
CTR- 4 4-15	1/4'' F. SAE x 1/4'' F. SAE - 60'' (1,5 m.)
CTR- 4 4-20	1/4'' F. SAE x 1/4'' F. SAE - 80'' (2,0 m.)
CTR- 4D 4-05	Soft Copper Capillary Tube 1/4'' (7/16'' 20UNF) Female SAE Flare swivel nut with Long Tan Copper Gasket B3 & Depressor x 1/4'' (7/16'' 20UNF) Female SAE Flare swivel nut with Long Tan Copper Gasket B3 - Length 20'' (0,5 m.)
CTR- 4D 4-10	1/4'' F. SAE x 1/4'' F. SAE - 40'' (1,0 m.)
CTR- 4D 4-15	1/4'' F. SAE x 1/4'' F. SAE - 60'' (1,5 m.)
CTR- 4D 4-20	1/4'' F. SAE x 1/4'' F. SAE - 80'' (2,0 m.)
CTR- 5D 4-05	Soft Copper Capillary Tube 5/16'' (1/2'' 20UNF) Female SAE Flare swivel nut with Long Tan Copper Gasket B3 & Depressor x 1/4'' (7/16'' 20UNF) Female SAE Flare swivel nut with Long Tan Copper Gasket B3 - Length 20'' (0,5 m.) for R-410a, R-32 .
CTR- 5D 4-10	5/16'' F. SAE x 1/4'' F. SAE - 1,0 m. R-410a, R-32
CTR- 5D 4-15	5/16'' F. SAE x 1/4'' F. SAE - 1,5 m. R-410a, R-32
CTR- 5D 4-20	5/16'' F. SAE x 1/4'' F. SAE - 2,0 m. R-410a, R-32

ACCESSORIES / SPARE PARTS

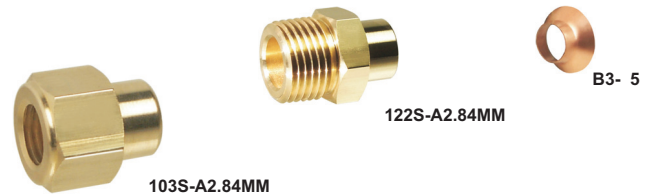

Model	Description
CTR04N	Heavy Duty Swivel Nut 1/4'' (7/16'' 20UNF) Fem. SAE
CTR05N	5/16'' (1/2'' 20UNF) F. SAE. R-410a, R-32.
CTR04	Solder Brass Ferrule 1/4'' F. SAE x 2,84 mm. ODS.
CTR05	5/16'' F. SAE x 2,84 mm. ODS R-410a, R-32.
103S-A2.84MM	Adapter 1/8'' Female NPT x 2,84 mm. ODS solder.
103S-B2.84MM	Adapter 1/4'' Female NPT x 2,84 mm. ODS solder.
122S-A2.84MM	Adapter 1/8'' Male NPT x 2,84 mm. ODS solder.
122S-B2.84MM	Adapter 1/4'' Male NPT x 2,84 mm. ODS solder.
B3- 4	Long Tan Copper Gasket for 1/4'' (7/16'' 20UNF) Female SAE.
B3- 5	5/16'' (1/2'' 20UNF) F. SAE. R-410a, R-32.
D3- 4	Brass Depressor 1/4'' (7/16'' 20UNF) Female SAE.
D3- 5	5/16'' (1/2'' 20UNF) F. SAE. R-410a, R-32.